



9-PIN D-CONNECTOR FEMALE

16-PIN DIN 41651 FEMALE



1 15

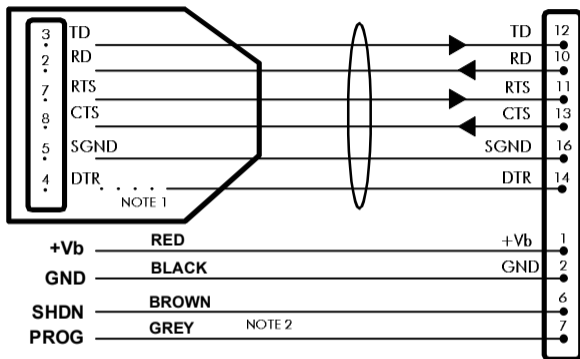

2 16

SECTION 'A'

NOTE !

- 1) The DTR wire is connected in the 16 Pin connector and wired to the 9-pin connector shell. The wire is NOT soldered to the D9 connector.
- 2) It is recommended to use separate cables for configuration and normal operation. Unused PROG and SHDN wires should be cut at the point where the wires exit the 16 pin plug.

**SATEL**Serial Interface Cable for
SATELLINE-1870 radio modem

Product

CRS-18F

Code

YC0187